



RAIL ROAD APPLICATION

NIPPON THOMPSON CO., LTD.

Super express train



LWHD25C2R730 . . .

LWHD35C2R620 . . .

PHS28

NART15UUR

Electric connection equipment

The equipment for electric connection when the top of current super express to new type super express.

Commuter train



LHSA12L

Truck(bogie) leveling equipment(adjusting height level depending on Platt form heights)

500 type super express of JR



LW L12C2R350

The equipment to adjust air pressure in the train when the train passing in the tunnel

Commuter train of JR East



Door guide



Upper side pushing purpose: LWHS20 C1 R170 BE 2 sets/door

Upper side open/close purpose: LWHS20 C2 R1446 BE 1 set/door

Lower side open/close purpose: LWHS15 C1 R977 SLE 1set/door

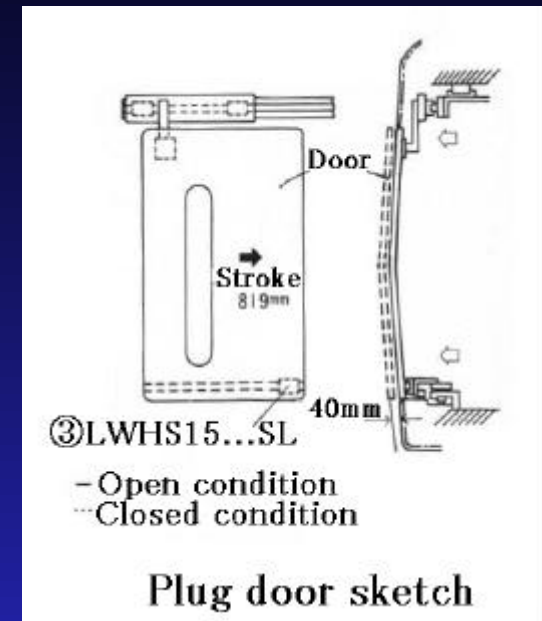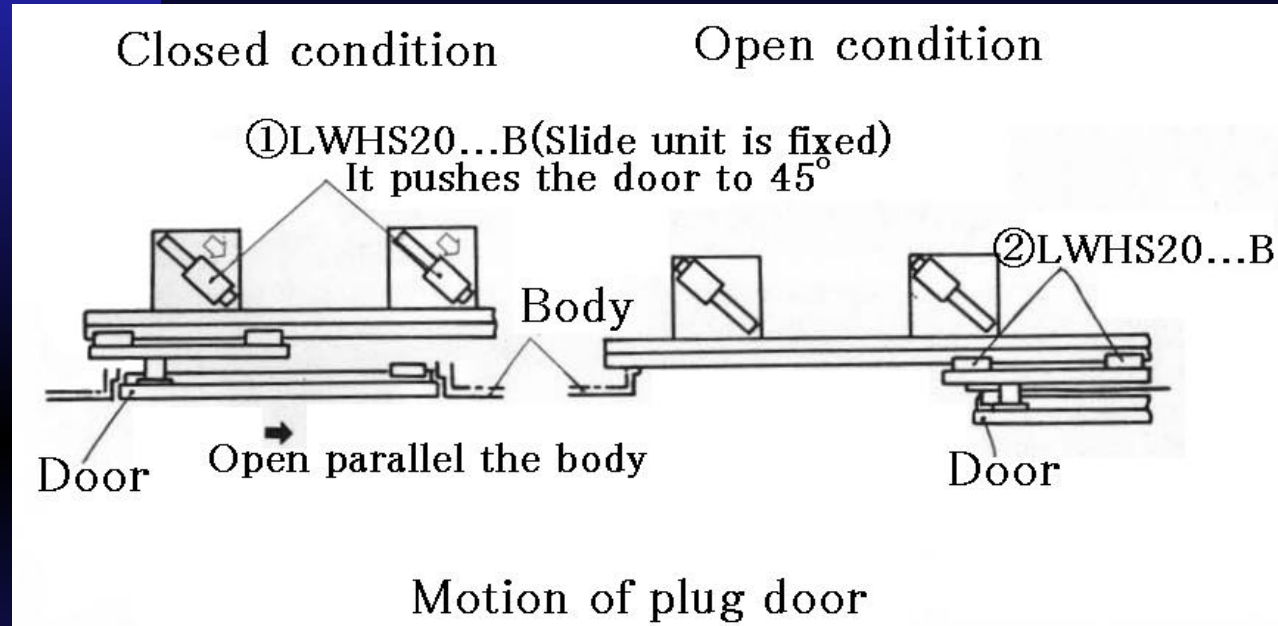

Advantage point

Recently resort express train require good design such as flat surface. By IKO Linear Way, the clearance between body to door can be made very small as 40mm at the open condition.


YURIKAMOME of Tokyo seaside new city rail road



CF8— 32BUURE

Support part at plug door from vibration

OSAKA NEWTRAM

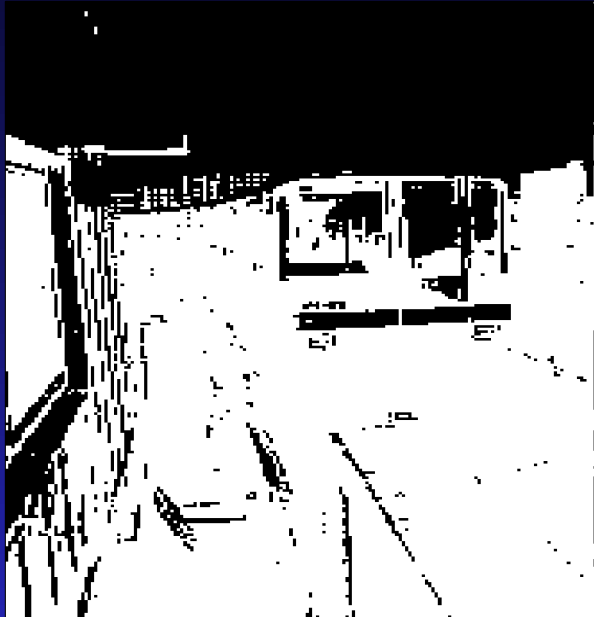

NTB 100135

AS 100135

Go and back transfer equipment

R1000 type of KEIOTEITO



LHSA12(L)

Truck(bogie) leveling equipment(adjusting height level depending on platt form heights)

KIHA75 train, EC313 train




LWESC15C2R1200SLE


LWESC15C1R670SLE

Window guide part for fee at one person train(driver only)

Platform door system

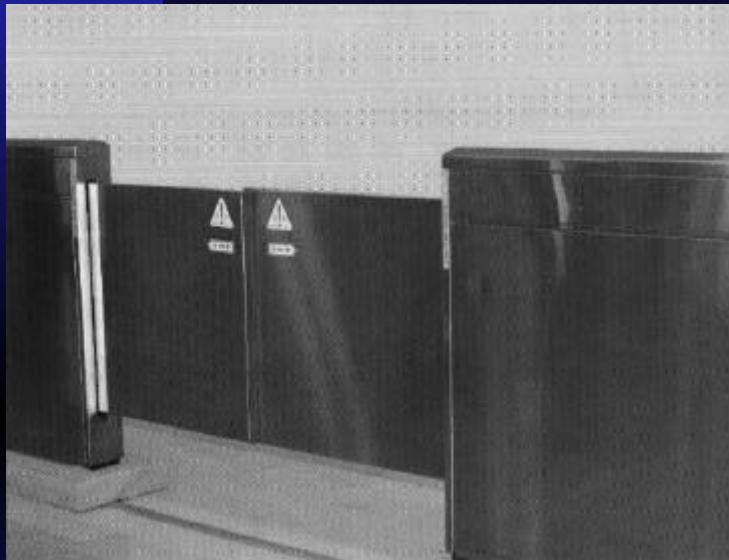

LRXC35 C2 R1360 E

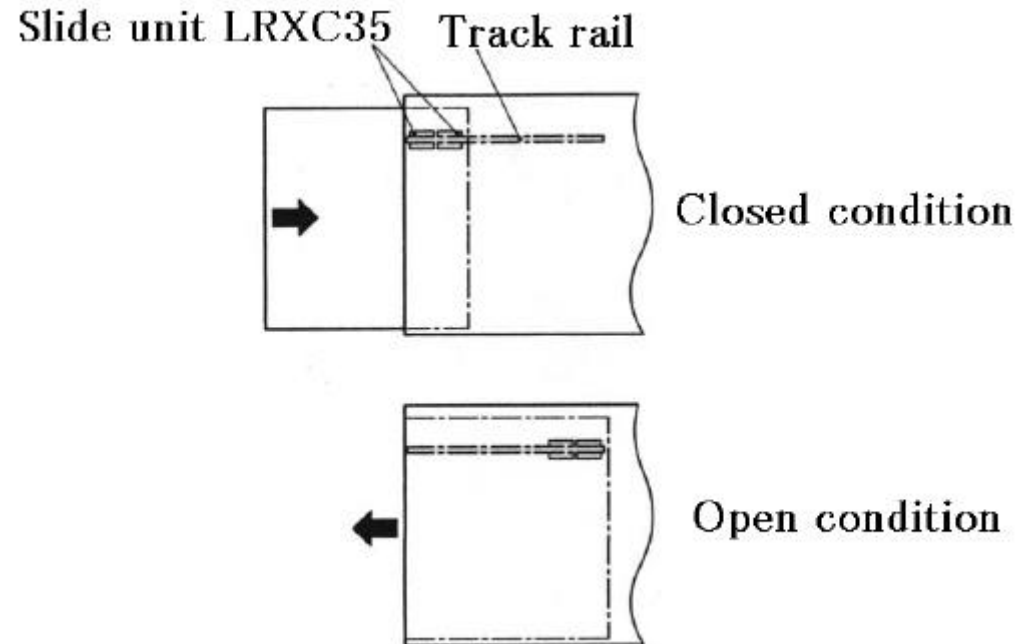

A station has platform door system to protect the human not to contact the train. Current platform door system has bad point that the guide rail of wheel disturbed passengers.



Finish